
RD-R7000-GS Black / Silver

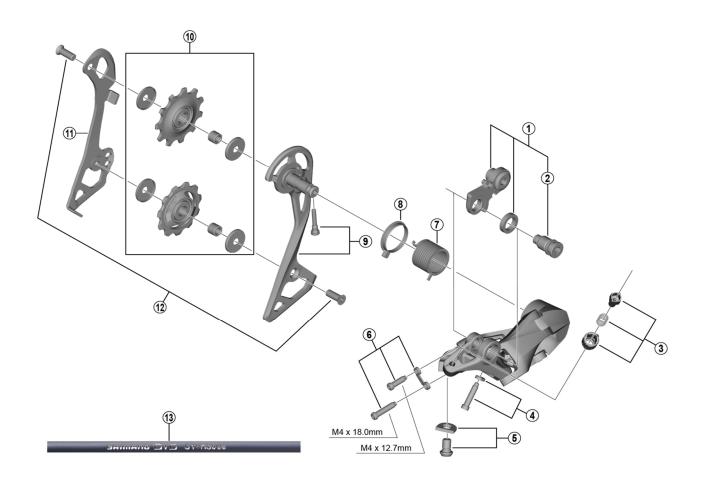

ITEM)-R8	
1 Y3F398020 Bracket Axle Unit (for normal type) B 2 Y3F358000 B-Axle 2 (for Direct Mount type) B 3 Y3F398030 Cable Adjusting Bolt Unit B 4 Y3E998040 End Adjusting Bolt (M4 x 18) & Plate A 5 Y3F398040 Cable Fixing Bolt & Plate A 6 Y3E998060 Stroke Adjusting Bolts & Plate A 7 Y5PV17000 P-Tension Spring A 8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt A 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A 13 Y0BM98021 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A			DESCRIPTION	INTERCHANGE-	
3 Y3F398030 Cable Adjusting Bolt Unit B 4 Y3E998040 End Adjusting Bolt (M4 x 18) & Plate A 5 Y3F398040 Cable Fixing Bolt & Plate A 6 Y3E998060 Stroke Adjusting Bolts & Plate A 7 Y5PV17000 P-Tension Spring A 8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A 13 Y0BM98021 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	1		Bracket Axle Unit (for normal type)		
4 Y3E998040 End Adjusting Bolt (M4 x 18) & Plate A 5 Y3F398040 Cable Fixing Bolt & Plate A 6 Y3E998060 Stroke Adjusting Bolts & Plate A 7 Y5PV17000 P-Tension Spring A 8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A 13 Y0BM98021 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	2	Y3F358000	B-Axle 2 (for Direct Mount type)		
5 Y3F398040 Cable Fixing Bolt & Plate A 6 Y3E998060 Stroke Adjusting Bolts & Plate A 7 Y5PV17000 P-Tension Spring A 8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	3	Y3F398030	Cable Adjusting Bolt Unit	В	
6 Y3E998060 Stroke Adjusting Bolts & Plate A 7 Y5PV17000 P-Tension Spring A 8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	4	Y3E998040	End Adjusting Bolt (M4 x 18) & Plate	Α	
7 Y5PV17000 P-Tension Spring A 8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	5	Y3F398040	Cable Fixing Bolt & Plate	Α	
8 Y5PV24000 P-Seal Ring A 9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	6	Y3E998060	Stroke Adjusting Bolts & Plate	Α	
9 Y3F398060 Outer Plate & Fixing Bolt B 10 Y3F398010 Tension & Guide Pulley Set B 11 Y3F316000 Inner Plate B 12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	7	Y5PV17000	P-Tension Spring	Α	
10	8	Y5PV24000	P-Seal Ring	Α	
11 Y3F316000 Inner Plate B	9	Y3F398060	Outer Plate & Fixing Bolt		
12 Y5V598140 Pulley Bolt (2 pcs.) A Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	10	Y3F398010	Tension & Guide Pulley Set	В	
Y0BM98011 OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	11	Y3F316000	Inner Plate	В	
Y0BM98021 OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	12	Y5V598140	Pulley Bolt (2 pcs.)	Α	
Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A	13	Y0BM98011	OT-RS900 (Black) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue)	Α	
Y0BM98031 OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue)		Y0BM98021	OT-RS900 (White) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue)	Α	
Y0BM98041 OT-RS900 (High-tech gray) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue) A		Y0BM98031	OT-RS900 (Red) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue)	Α	
		Y0BM98041	OT-RS900 (High-tech gray) 240 mm x 10 pcs. (with Sealed Outer Cap & Outer Cap with Long Tongue)	Α	

Jun.-2018-4338A

© Shimano Inc. I

B: Parts are usable, but differ in materials, appearance, finish, size, etc.

Absence of mark indicates non-interchangeability. Specifications are subject to change without notice.